

LED Corncob


HID Replacement



If the fixture contains ballast, it must be by-passed or removed before this LED lamp is installed.

B 120 Watts
600Watt
HID Replacement
Mogul Base (E39)

A 45 Watts
200Watt
HID Replacement
Mogul Base (E39)

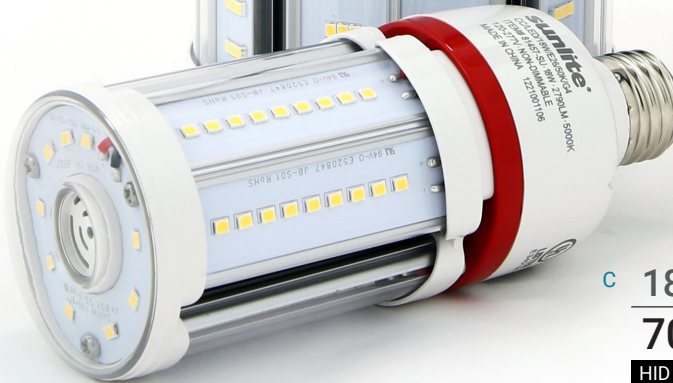

C 18 Watts
70 Watt
HID Replacement
Medium Screw (E26)

Item#	Description	Watt	EQ. Watt	Lumen	LPW	Volt	Color Temp	Hours	Features	Dimension(in)
Mogul Base (E39)										
A 81430-SU	CC/LED/45W/E39/50K/G4	45	200 HID	6975	155	120-277	5000K	5000	DLC,IP64	9.5 x 2.36 (D)
B 81456-SU	CC/LED/120W/E39/50K/G4	120	600 HID	18600	155	120-277	5000K	5000	DLC,IP64	11.7 x 4.45 (D)
Medium Screw (E26)										
C 81457-SU	CC/LED/18W/50K/G4	18	70 HID	2790	155	120-277	5000K	5000	DLC,IP64	6.38 x 2.36 (D)